



Neville Crocker Australia Pty Ltd

A.B.N. 14 005 496 051

2/32 Miles Street,
Mulgrave, Victoria,
3170 Australia

Phone: +61 3 9560 5333

Fax: +61 3 9561 6172

Email: enquiries@ncawaterfeatures.com.au



www.ncawaterfeatures.com.au

FLOAT LEVEL SWITCH – LC13



Technical characteristics :

Operation mode	: omnidirectional
Maximum pressure	: 5 bars
Protection index	: IP 68
Standardized cables	: neoprene 3 x 1 mm ²
Allowed fluid density	: 0.60 to 1.15
Maximum temperature	: 85° with neoprene cable
Shell	: biconical - copolymer polypropylene
Direct cut-out power	: 20 (8) A (20 A resistive - 8 A inductive)
Power supply	: 250 VAC - 50 / 60 Hz
Reverser microswitch	: silver / cadmium oxide contacts
Float weight without cable	: 100 g
Cable weigh	: neoprene: 105 g/m
Standard cable lengths	: 10m

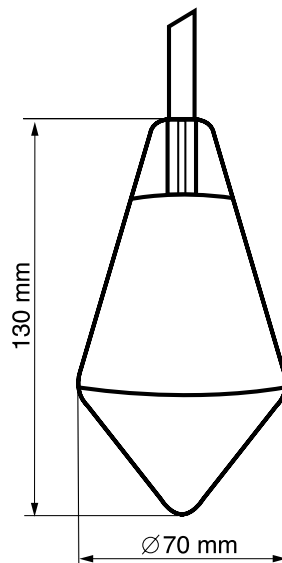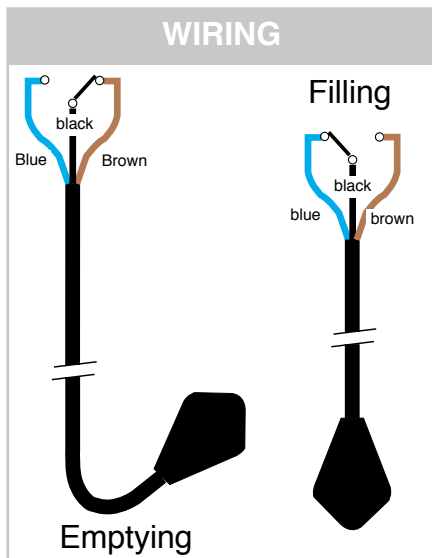

Applications :

Regulation of small and
cellar pumps

DIFFERENTIAL ANGLE

